



700HBAW_1.5 series

700W Half-Brick - Single Output DC-DC Converter - Wide Input - Isolated & Regulated

DC-DC Converter 700 Watt

- ⊕ Compliance with RoHS6 EU Directive 2011/65/EU
- ⊕ Delivers up to 25A output current
- ⊕ High efficiency, typ.94% at 48Vin half load
- ⊕ Low output ripple and noise
- ⊕ Exceptional thermal performance
- ⊕ Industry standard "Half-brick" footprint
- ⊕ Fixed switching frequency (270 kHz typical)

- ⊕ Remote Sense
- ⊕ Input under voltage lockout
- ⊕ Output over voltage protection
- ⊕ Over temperature protection
- ⊕ Output over current protection
- ⊕ Adjustable output voltage (14VDC~33VDC)
- ⊕ Meets the voltage and current requirements for ETSI 300-132-2 and complies with and licensed for Basic Insulation rating per IEC60950-1

The 700HBAW_1.6 series are half-brick DC/DC converters that provide high efficiency single output. They can operate from 36VDC to 75VDC-Input and 28V/25A output. The output can be trimmed from (14VDC~33Vdc) of normal output voltage. The remote control option is positive logic. The converter turns on when the REM pin is at logic high and turns off when it at logic low, both are referenced to -Vin. The converter is on when the REM pin is left open. The output voltage trim option is positive. The output voltage will increase when the TRIM pin connected to +S pin and decrease when it connected to -S pin. The output voltage will increase when the TRIM pin connected to +S pin and decrease when it connected to -S pin.



Output specifications					
Item	Test condition	Min	Typ	Max	Units
Short circuit protection	Hiccup Mode Automatic recovery	4			h
Efficiency	Vin=48V, 100%load ambient temperature 25°C	91	93		%
Operating temp	Base Plate	-40		100	°C
Ambient Temperature		-40		85	°C
Storage temperature		-55		125	°C
Operating Humidity				90	%RH
Storage Humidity				90	%RH
Operating Altitude		0		3000	m
Storage Altitude		0		3000	m
Switching Frequency	Vin=Vin(nom); Io=Io(max); Fixed frequency	220	270	320	kHz
MTBF	Telcordia SR332, 40°C Ta	2,800,000			h
FIT	109/MTBF		357		
Thermal Stability Time		-	30		min
Weight		85	95	105	g
Safety	Compliant to IEC60950-1,UL60950-1,EN60950-1,GB4943				
Vibration	IEC60068-2-6:10-500Hz sweep,0.75mm excursion,10g acceleration, 10min in each 3 perpendicular directions				
Transportation	ETS300019-1-2				
Shock	IEC60068-2-27:200g acceleration, duration 3 ms,6 drops in each 3 perpendicular directions				

Input specifications					
Item	Test condition	Min	Typ	Max	Units
Input voltage	• Continuous • Transient (100ms)			80 100	VDC VDC
Operating Input Voltage		36	48	75	VDC
Max. Input Current	100% load Vin=36V			22.5	A
No load Input Current	No load Full Input Voltage			200	mA
Standby Input Current	mA		10	100	mA
Input Reflected Ripple Current Peak-to-Peak	12 µH source impedance, add 470µF electrolytic and 1µF ceramic capacitor at input		150	300	mA
Recommended External Input Capacitance	Low ESR capacitor recommended	470			µF
Filter Component Value			14/0.33		µF/uH
Inrush Transient			1		A ² S
Input fuse			40		A

Output specifications					
Item	Test condition	Min	Typ	Max	Units
Voltage set point	Vin=Vin(nom); Io=Io(max)	27.6	28	28.4	VDC
Output Current			25		A
Line regulation	Vin=Vin(min) to Vin(max) Io= Io(max)		0.4	1	%
Load regulation	Io=0 to Io(max);Vin=Vin(nom)		0.4	1	%
Total Output Voltage Range	Over sample, line, load, temperature & life	27.2	28	28.8	VDC
Output Voltage Precision	Vin=Vin(min) to Vin(max) Io=0 to Io(max)		1.5	3	%Vo
Output Voltage Adj. Range	Rated power Po=0-700W see figure 11 and 12	14		33	VDC
Remote Sense Compensation			10		%Vo
Output current limit inception	Ambient Temperature 25°C, Hiccup mode Automatic recovers	26.5		37.5	A
External load capacitance	ESR<200mΩ at -40°C, recommend 2-3PCS KY, KZE and KZH series aluminum capacitors in parallel	1100		4400	µF
Temperature coefficient	Ambient Temperature -40°C ~85°C		200		ppm /°C
Dynamic response	25%-50%-25%&50%-75%-50% Io(max) di/dt=0.1A/µS • Overshoot Range • Recovery Time		350 100	700 500	mV µS
Ripple & Noise	Measured with 10µF Tantalum external and 1µF ceramic capacitor at output, 100%load, 20MHz bandwidth	100	50	250	mVp-p mVRMS
Turn-on delay time	Time from instant at which Vin=Vin(min) until Vo=10% of Vo(nom)	200	400	800	ms
Turn-on Rise Time	Time for Vo to rise from 10% of Vo(nom) to 90% of Vo(nom)		100	300	ms
Turn off Fall Time	From Vo drop point to drop to 10V,Io=0A • Cout=1000uF • Cout=4400uF		100 400	200 600	ms ms
Output Voltage Overshoot			5		%Vo

Example:
700HBAW_4848S1.5
W = 700 Watt; HB = Half-Brick; A = Pinning; W = Wide input (2:1);
48 = 36-72 Vin; 48 = 48Vout; S = Single Output; 1.5 = 1.5kVDC Isolation

700HBAW_1.5 series

700 W Half-Brick - Single Output DC-DC Converter - Wide Input - Isolated & Regulated

Isolation specifications					
Item	Test condition	Min	Typ	Max	Units
Isolation voltage	Tested for 1 minute leak current <10mA • Input-output • Input-case • Output-case		1500		VDC
			1050		VDC
			500		VDC
Isolation resistance	Normal air pressure, 500Vdc, the isolation resistance is no more than 10 MΩ	10			MΩ
Isolation Capacitor (Input-Output)		3080	4400		pF

Remote control specifications					
Item	Test condition	Min	Typ	Max	Units
Turn off Voltage	Converter guaranteed on when REM pin is left open	-0.3		0.8	V
Turn on Voltage	Converter guaranteed on when REM pin is left open	3.0		20	V

Protection specifications					
Item	Test condition	Min	Typ	Max	Units
Input under voltage lockout	• Turn-off threshold • Turn-on threshold • Hysteresis	32		35	VDC
		31		34	VDC
		1	2	3	VDC
Output over voltage protection	Under the converter's maximum allowable output power. hiccup	58		65	VDC
Output over current protection	Hiccup mode, automatic recovery		Yes		
Over temperature protection	Automatic recovery See OTP section	102	110	120	°C
Over temperature protection Hysteresis	Automatic recovery See OTP section	2	5	10	°C

Note:

1. Operation under minimum load will not damage the converter; However, they may not meet all specification listed, and that will reduce the life of product.
2. All specifications measured at Ta = 25°C, humidity <75%, nominal input voltage and rated output load unless otherwise specified.
3. In this datasheet, all the test methods of indications are based on corporate standards.

Product Selection Guide

Part Number	Input Voltage [V]	Input current [A, max]	Output Voltage [VDC]	Output Current [A, typ/max]	Efficiency* [%, min/typ]
700HBAW_4828S1.5	36-72	2.45	28	8.3/9.1	87/90

* Vin = Vin(nom); Io = Io(max), ambient temperature 25°C

Typical Characteristic Curves

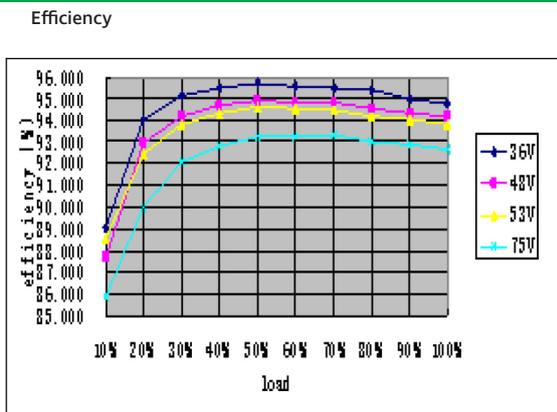


Figure1. Converter Efficiency Vs. Output Current@25°C

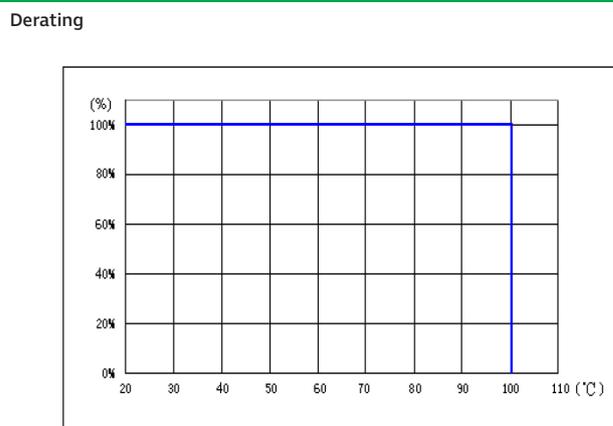


Figure2. Output power derating curve, load current Vs. aluminum baseplate temperature,48VIn

Dynamic Response

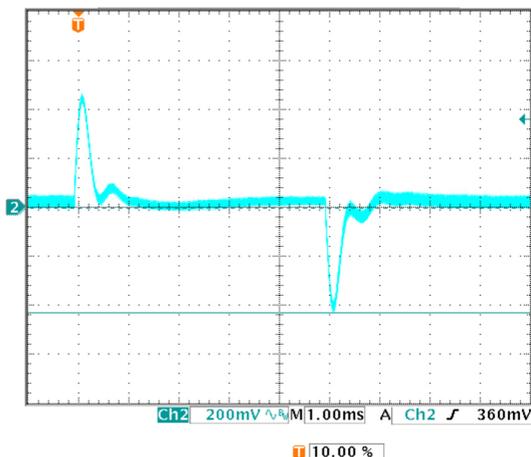


Figure3. Vin=48V/Vo=28V,25%-50%load,0.1A/μs@25°C

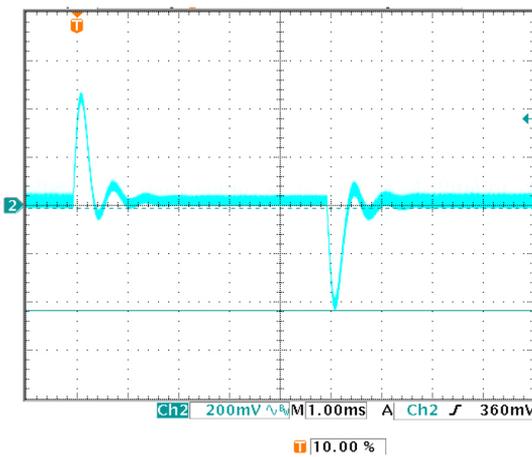


Figure4. Vin=48V/Vo=28V,50%-75%load,0.1A/μs@25°C

700HBAW_1.5 series

700 W Half-Brick - Single Output DC-DC Converter - Wide Input - Isolated & Regulated

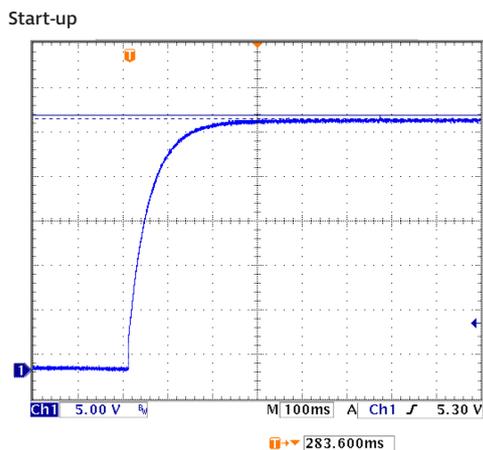


Figure 5. Typical Start-up ($V_{in}=48V, 100\% \text{ load}@25^{\circ}C$)


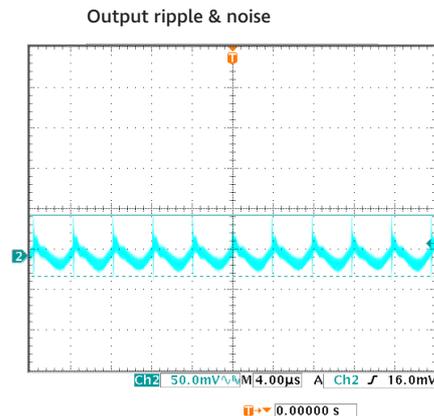


Figure 6. Output ripple and noise @ $V_{in}=48V, 100\% \text{ load}$ (20MHz bandwidth@ $25^{\circ}C$)


Test configurations

Input Reflected Ripple Current Test Setup (figure 7)

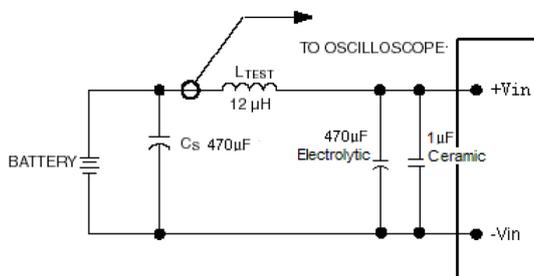

Note: Measure input reflected ripple current with a simulated source inductance of $12\mu H$. The measurement points for input reflected ripple current is showed above.

Output Ripple and Noise Test Setup (figure 8)

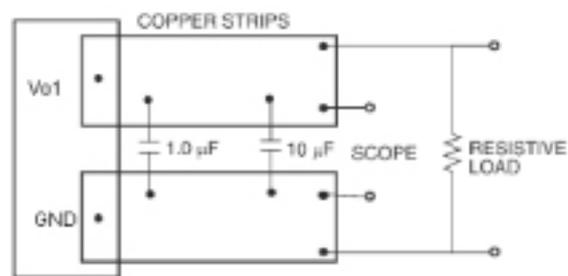

Note: Scope measurements should be made using a BNC socket with a $1\mu F$ ceramic capacitor and a $10\mu F$ tantalum capacitor. Position the oscilloscope probe between 51mm and 76mm ($2in$ and $3in$) from the module

Design considerations

Input filtering

The power module should be connected to a low impedance input source. Highly inductive source impedances can affect the stability of the power module. For the test configuration in Figure 7 a $470\mu F$ electrolytic capacitor and a $1\mu F$ ceramic capacitor, mounted close to the power module helps ensure stability of the unit.

Safety considerations

For safety-agency approval of the system in which the power module is used, the power module must be installed in compliance with the spacing and separation requirements of the end-use safety agency standard, i.e. UL60950-1, CAN/CSA-C22.2, No. 60950-1 and EN60950-1:2001(+A11) and IEC60950-1:2005, if the system in which the power module is to be used must meet safety agency requirements.

These converters have been evaluated to the spacing requirements for Basic Insulation, per the above safety standards.

For all input voltages, other than DC mains, where the input voltage is less than 60Vdc, if the input meets all of the requirements for SELV, the output is considered to remain with SELV limits. Signal component failure and fault tests were performed in the power converters.

If the input source is non-SELV (ELV or hazardous voltage greater than 60Vdc and less than or equal to 75Vdc), for the module's output to be considered as meeting the requirements for safety extra-low voltage (SELV), all of the following must be true.

1. The input source is to be provided with reinforced insulation from any other hazardous voltage, including the AC mains.
2. One VIN pin and one VOUT pin are to be grounded, or both the input and output pins are to be kept floating.
3. The input pins of the module are not operator accessible.
4. Another SELV reliability test is conducted on the whole system as required by the safety agencies, to verify that under a single fault, hazardous voltages do not appear at the module's output.

All flammable materials used in the manufacturing of these modules are rated 94V-0.

To preserve maximum flexibility, internal fusing is not included, however, to achieve maximum safety and system protection, always use an input line fuse. The safety agencies require a time delay fuse with a maximum rating of 30A. Based on the information provided in this data sheet on inrush energy and maximum dc input current, the same type of fuse with a lower rating can be used. Refer to the fuse manufacturer's data sheet for further information.

Feature descriptions

Remote on/off

The REM pin is used to turn the power converter remote on or off via a system signal. Two remote on/off logic are available. Negative logic turns the module on when the REM pin is at logic low and off when it is at logic high. Positive logic turns the module on during logic high and off during logic low.

To turn the power module on and off, the user must supply a switch to control the voltage between the REM pin and -Vin terminal (see Figure 9). A logic low is VREM = 0.3 to 0.8 V. During logic high, the maximum VREM voltage generated by the power module is 20V. If not using the remote on/off feature, perform one of the following to turn the converter on:

- For negative logic, short REM pin to -Vin.
- For positive logic, leave REM pin open.

Remote sense

Remote sense minimizes the effects of distribution losses by regulating the voltage at the remote sense connections (see Figure 10). The voltage between the remote sense pins and the output terminals must not exceed the output voltage sense range. The voltage between the +Vo1 and GND terminals must not exceed the minimum output overvoltage protection value shown in the Electrical Specifications table. This limit includes any increase in voltage due to remote sense compensation and output voltage programming (trim). If not using the remote sense feature to regulate the output at the point of load, then connect +S to +Vo1 and -S to GND. Although the output voltage can be increased by both the remote sense and by the trim, the maximum increase for the output voltage is not the sum of both. The maximum increase is the larger of either the remote sense or the trim.

The amount of power delivered by the module is defined as the voltage at the output terminals multiplied by the output current. When using remote sense and trim, the output voltage of the module can be increased, which at the same time the output current would increase the power output of the module. Care should be taken to ensure that the maximum output power of the module remains at or below the maximum rated power.

Output Voltage Programming

When trimming up, the output current should be decreased accordingly so as not to exceed the maximum output power and the minimum input voltage should be increased as shown in the Figure 11 and Figure 12.

Resistance adjustment mode

Output voltage trim allows the user to increase or decrease the output voltage set point of a module. This is accomplished by connecting an external resistor between the TRIM pin and either the +S or -S pins. If not using the trim feature, leave the TRIM pin open. To increase the output voltage, refer to Figure13. A trim resistor, Rtrimup, connect between the TRIM pin and +S pin.

$$R_{trimup} = \left(\frac{V_{nomi} \times (100 + \Delta)}{1.225 \times \Delta} - \frac{(100 + 2 \times \Delta)}{\Delta} \right) K\Omega$$

R_{trimup} = Required value of trim-up resistor [kΩ]

$$\Delta = \left| \frac{V_{out} - V_{nom}}{V_{nom}} \times 100 \right|$$

V_{nom} = Nominal value of output voltage [V]

V_{out} = Desired (trimmed) output voltage [V].

Trimming beyond 33V is not an acceptable design practice, as this condition could cause unwanted triggering of the output overvoltage protection (OVP) circuit. When trimming up, care must be taken not to exceed the converter's maximum allowable output power. To decrease the output voltage (see Figure14.), a trim resistor, Rtrimdown, should be connected between the TRIM and -S, with a value of

$$R_{trimdown} = \left(\frac{100}{\Delta} - 2 \right) K\Omega$$

$R_{trimdown}$ = Required value of trim-down resistor [kΩ]

$$\Delta = \left| \frac{V_{out} - V_{nom}}{V_{nom}} \times 100 \right|$$

V_{nom} = Nominal value of output voltage [V]

V_{out} = Desired (trimmed) output voltage [V]

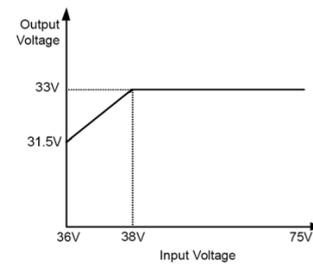
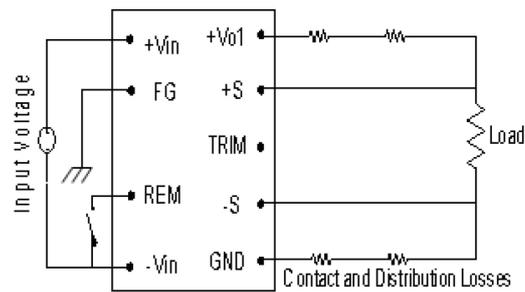
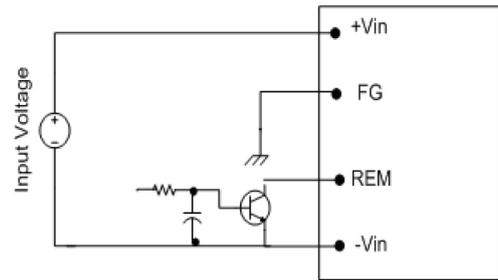


Figure11. Max. adjustable output voltage vs. input

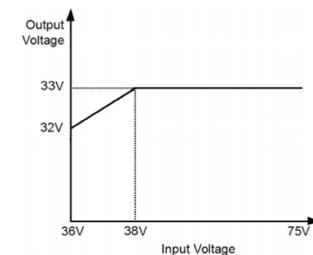


Figure12. Max. adjustable output voltage vs. input

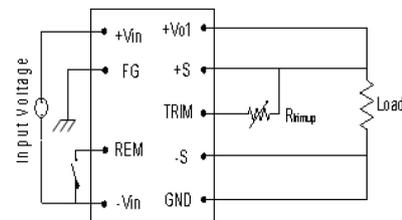


Figure13. Circuit Configuration to Increase Output

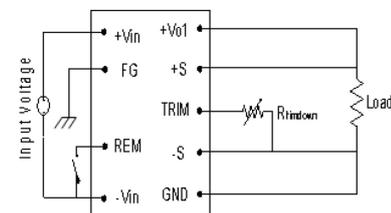


Figure14. Circuit Configuration to Decrease Output

700HBAW_1.5 series

700 W Half-Brick - Single Output DC-DC Converter - Wide Input - Isolated & Regulated

Voltage adjustment mode

The output voltage can also be trimmed by potential applied at the trim pin. An external trim resistor is connected between trim pin and Vtrim. See Figure 15.

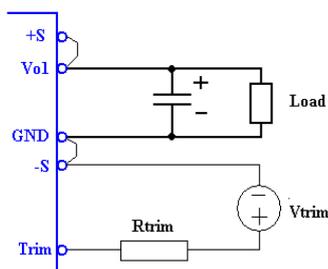


Figure15. Trim circuit by voltage mode

The relationship between Vtrim and Vo is described as below:

$$V_{trim} = \frac{(2 + R_{trim}) * V_{out}}{22,581} - (1 + R_{trim}) * 1.24$$

V_{nom} = Nominal value of output voltage, 28V

V_{out} = Desired (trimmed) output voltage [V]

V_{trim} = The potential applied at the trim pin [V]

R_{trim} = The external trim resistor [kΩ]

When $R_{trim}=0$ kΩ

$$V_{trim} = 0.0886 * V_{out} - 1.24$$

The trim curve is shown as Figure 16.

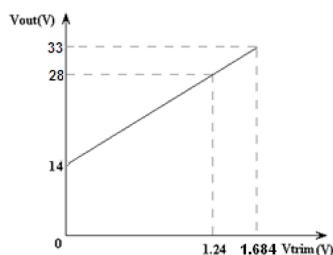


Figure16. Trim curve when $R_{trim}=0$ kΩ

When $R_{trim}=1$ kΩ

$$V_{trim} = 0.1329 * V_{out} - 2.48$$

The trim curve is shown as Figure 16.

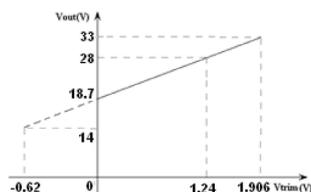


Figure17. Trim curve when $R_{trim}=1$ kΩ

When $R_{trim}=2$ kΩ

$$V_{trim} = 0.1771 * V_{out} - 3.72$$

The trim curve is shown as Figure 17.

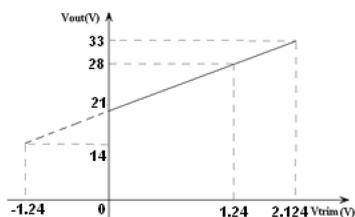


Figure18. Trim curve when $R_{trim}=2$ kΩ

700HBAW_1.5 series

700 W Half-Brick - Single Output DC-DC Converter - Wide Input - Isolated & Regulated

Protection features

Over current Protection

To provide protection in an output overload fault condition, the module is equipped with internal current limiting circuitry, and can endure current limiting continuously. At the point of current limit inception, the unit enters hiccup mode. The unit is configured with the auto-restart function, it will remain in the hiccup mode as long as the overcurrent condition exists, it operates normally once the output current is reduced back into its specified range.

Output Overvoltage Protection

The output over voltage protection consists of circuitry that monitors the voltage on the output terminals. When the output voltage exceeds the overvoltage protection threshold, the module will operate in a hiccup mode until overvoltage cause is cleared.

Over temperature Protection

To provide protection under certain fault conditions, the module is equipped with a thermal shutdown circuit. The module will shutdown when the aluminum baseplate temperature exceeds OTP set value, but the thermal shutdown is not intended as a guarantee that the module will survive when the temperatures beyond its rating. The module will automatically restarts after it cools down.

Input Undervoltage Lockout

Input under-voltage lockout is standard with this converter, when input voltages below the input under-voltage lockout limit, the module operation is disabled. It will only begin to operate once the input voltage is raised above the undervoltage lockout turn-on threshold

Thermal considerations

The power modules operate in a variety of thermal environments; however, sufficient cooling should be provided to help ensure reliable operation of the unit.

Considerations include ambient temperature, airflow, module power dissipation, and the need for increased reliability. A reduction in the operating temperature of the module will result in an increase in reliability.

Through-Hole Soldering Information

The product is intended for through-hole mounting in a PCB. When wave soldering is used, the temperature on the pins is specified to maximum 270 °C for maximum 10 seconds.

Maximum preheat rate of 4 °C/s and temperature of max 150 °C is suggested, when hands soldering care should be taken to avoid direct contact between the hot soldering iron tip and the pins for more than a few seconds in order to prevent overheating.

A no-clean (NC) flux is recommended to avoid entrapment of A noclean (NC) flux is recommended to avoid entrapment of cleaning fluids in cavities inside of the DC/DC power module. The residues may affect long time reliability and isolation voltage.

EMC Considerations

The Figure 20 shows a suggested configuration to meet the conducted emission limits of EN55022 Class B.

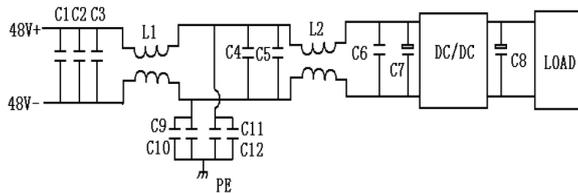



Figure20. EMC testing typical application circuit

Component	parameters
C1 C2 C3 C4 C5	1uF SMD ceramic capacitor
C6	0.1uF SMD ceramic capacitor
L1 L2	470uH Common-mode inductance
C9 C10 C11 C12	0.22uF Isolation voltage SMD capacitor
C7	470uF electrolytic capacitor
C8	1000uF electrolytic capacitor

700HBAW_1.5 series

700 W Half-Brick - Single Output DC-DC Converter - Wide Input - Isolated & Regulated

Outline Diagram

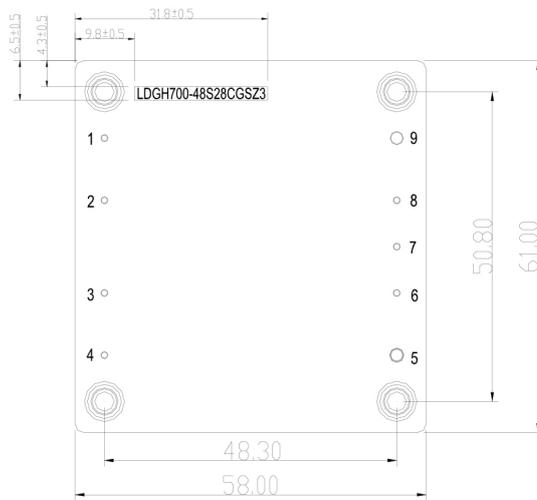

Pin options	L(Pin length)
standard	5.8(0.23)
Z1	2.8(0.11)
Z2	4.6(0.18)
Z3	3.6(0.14)
Z4	6.4(0.25)

Bottom View

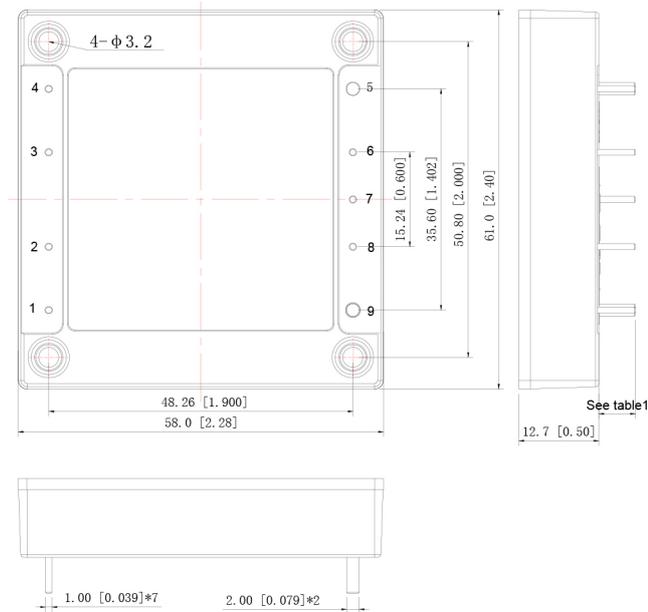


Figure21. Outline Diagram

Dimensions are in millimeters and (inches).
 Tolerances: x.x mm \pm 0.5 mm (x.xx in. \pm 0.02 in.) [unless otherwise indicated]
 x.xx mm \pm 0.25 mm (x.xxx in. \pm 0.010 in.)

700HBAW_1.5 series

700 W Half-Brick - Single Output DC-DC Converter - Wide Input - Isolated & Regulated

Recommended Pad Layout

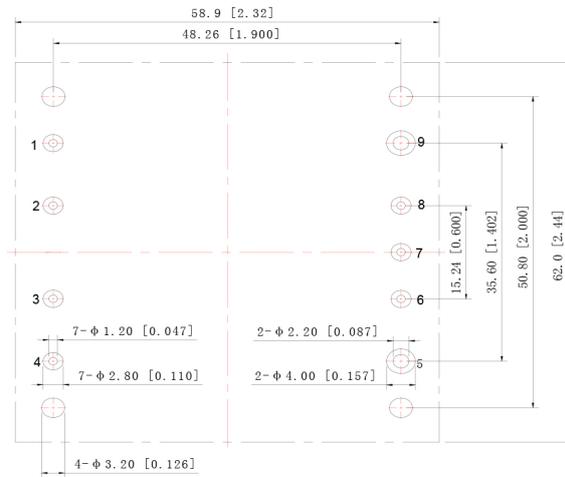


Figure 22. Recommended Pad Layout

Dimensions are in millimeters and (inches).

Tolerances: x.x mm \pm 0.5 mm (x.xx in. \pm 0.02 in.) [unless otherwise indicated]

x.xx mm \pm 0.25 mm (x.xxx in. \pm 0.010 in.)

Pin	S	Function
1	+Vin	Positive input voltage
2	REM	Remote control
3	FG	Case
4	-Vin	Negative input voltage
5	GND	Negative output voltage
6	-S	Negative remote compensation
7	TRIM	Output voltage trim
8	+S	Positive remote compensation
9	+Vo1	Positive output voltage